

Glass Bridge Display® Installation Guide

Part 1: Flush Mount Display

Step 1

Refer to template for cutout dimensions

Step 2

Slide display into cutout

Step 3

Install bolt clips into slots on Glass Bridge Display®


Step 4

Thread bolts into clips leaving 1/8" gap between bolt and dash

Step 5

Insert centering plate and evenly tighten all bolts

DO NOT OVER TIGHTEN

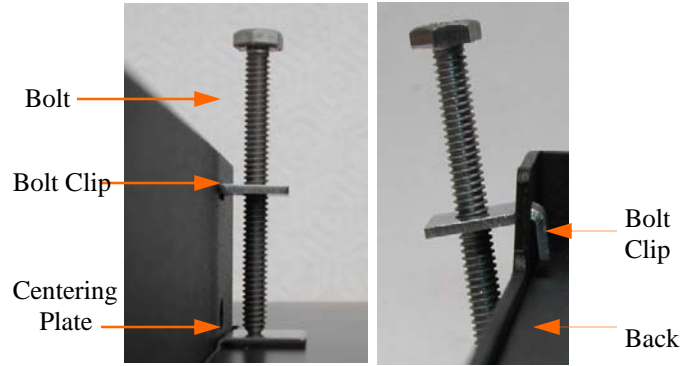

Part 2: Connecting the Display to Power

Step 1

Connect input voltage wires (1) from vessels power supply (i.e. 12, 14, 36 VDC or 110 VAC as specified on order) to Nauticomp power supply. Connect red wire to positive input terminal and the black wire to negative input terminal. Tighten connectors securely.

Step 2

Connect the wires (2) from the display to the power supply. Connect red wire to positive output terminal and the black wire to the negative output terminal. Tighten connectors securely.

DO NOT ADJUST (3) - FACTORY PRESET



Part 3: Connecting Cables to the Display

POWER OUTPUT FROM THE PROVIDED NAUTICOMP POWER SUPPLY IS TO BE 12.4VDC. PLEASE DOUBLE CHECK BEFORE CONNECTING TO THE DISPLAY FOR THE FIRST TIME.

PLEASE NOTE: ALWAYS CONNECT ALL VIDEO INPUT CABLES BEFORE CONNECTING THE POWER

Step 1

Press the DVI / VGA connectors into place and tighten screws firm, **DO NOT** over tighten

Step 2

Align LTW logo on connector so that it faces away from the display. Press in and screw connector clockwise until secure, repeat step for all LTW round ended cables.

Step 3

Gently pull all cables to insure that they are connected securely.




For Any assistance with the operation of your new Glass Bridge Display®, Please call us @ 705-328-2992

See reverse for Quick Reference Guide

NAUTICOMP

Glass Bridge Display® Quick Reference Guide

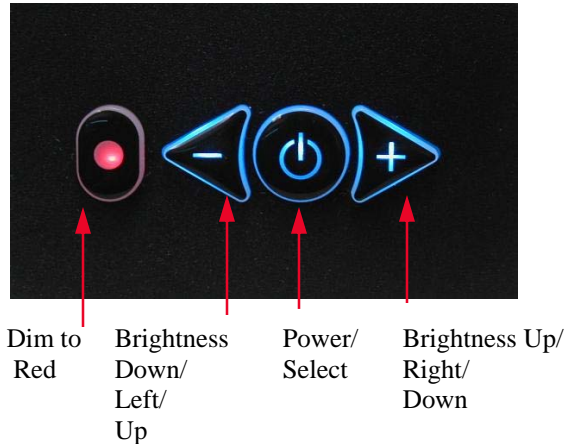

GB Commander

The GB Commander is an external, four button display control that is the control for your Glass Bridge Display®.

Each button serves more than one function . Each button is labeled with all of its functions in the image to the left.

Before referring to this guide, the display must be mounted and connected to the 12 volt power supply.

Getting Started:

The Glass Bridge Display® will automatically power on when it is connected to the 12 volt power supply. To turn off the display you must press and hold the power button for 5 seconds. To turn on the display press and release the power button.

Adjusting backlight brightness up and down:

When the display is powered on and there is no menu, the +/- buttons are used to adjust the brightness of the display.

Accessing the Menu features:

By pressing and releasing the **power button** , access to the **menu** will be achieved. By pressing the +/- buttons 5 different menu tabs will be accessible. When the appropriate tab is highlighted, pressing the **power button** will gain access to the contents of the tab. Using the +/- buttons will highlight different options inside the tab. When the appropriate option is highlighted press the **power button**. If the option is adjustable a window at the bottom of the display will appear. Using the +/- **buttons will adjust the setting**. When proper adjustment is achieved, press the **power button** to save and return to the option area. If the option is not adjustable, pressing the power button will scroll through the different settings. When exiting the menu highlight the exit in the option area and press the power button. Highlight the exit tab on the far left and press the power button.

**** Please note: The menu is designed to stay at the position that you left off. This is for quick access to features that you desire most.**

How to activate PIP and change video sources :

- 1) When the display is powered on press the power button.
- 2) The menu is now displayed and the input tab is highlighted. Press the power button to access the input tab.
- 3) The source function is now highlighted. Press the power button once to activate PIP.
- 4) Press the + button to highlight the main source option. When highlighted press the power button to scroll through the different inputs.
- 5) When the desired input is selected, press the + button to highlight the PIP source.
- 6) Press the power button to scroll to the desired input.
- 7) Press the + button until the exit at the bottom is highlighted. Press the power button to select exit.
- 8) Using the + button move to the right until the exit tab is highlighted. Press the power button to exit the menu.

For Any assistance with the operation of your new Glass Bridge Display®, Please call us @ 705-328-2992

See reverse for Installation Guide