

26" Centric GB Display

ELECTRICAL DESCRIPTION

Display Characteristics:

Type: 25.5" Active Matrix TFT
Dot Number: 1920 x 1200 Pixels
Dot Pitch: 0.270 mm
Active Display Area: 550.1 mm x 343.8 mm
Response Time: 12ms Average - Typical
Contrast Ratio: 2000:1 Min.
Brightness / Light Intensity: 450 cd/m² (Nits) - Typical
Viewing Angles L/R/U/D: 89°/89°/89°/89°
Backlight Life: 50,000 Hours - Typical
Colour Depth: 16.7 Million (Depending on Graphics Card)

Dimming:

Range: 0-100% (Dimming Ratio 1000:1)

DVI-I Input:

Digital Interface: DVI 1.0 Compatible Interface
108 MHz Operation.

VGA Input:

Analog: RGB 0.7-1.0V p-p
Impedance: 75 Ohms
Sync. Type/Level: Sync-on-Green (-ve) 0.3V

Synchronisation Range:

Horizontal Scan: 15 - 100 kHz
Vertical Scan: 30 - 100 Hz

Resolutions:

VESA Support for: 1900 x 1200 WUXGA*
1600 x 1200 UXGA
1280 x 1024 SXGA
1024 x 768 XGA
800 x 600 SVGA
640 x 480 VGA
*Recommended for optimised resolution...

Composite Video Input:

Input Source: NTSC, PAL, SECAM

Input Voltage:

AC (Auto-Ranging) Input: 115/230V AC +/- 10%

Power Consumption:

AC Supply: 88.2 W

Environmental:

**Operating Temp: -15 to +55°C (IEC 60945)
Storage Temp: -25 to +70°C
Operating Humidity: 30% to 90% (Non-Condensing)
Storage Humidity: 10% to 90% (Non-Condensing)
Vibration: +/-1mm, 2 to 13Hz: 0.7g 13 to 100 Hz

**We DO NOT recommend routine operation @ extreme temperatures...

MECHANICAL DESCRIPTION

Construction:

Finish: Front Bezel - Bonded Glass
Rear Housing - Modular Metal Construction
Housing: Chemically Treated Metal
Front Sealing: Front Bezel IP67
Protective Safety Glass: Conturan Hardened, Laminated & Anti-glare coated.
Ventilation: Convection (No Fans)

Dimensions:

Display for Flush Mounting (mm): 16.22" (411.9) H x 24.37" (618.9) W x 3.54" (89.9) D
Panel Cut-out (mm): 15.71" (399) H x 23.86" (606) W

Weight:

Display (kg) : 30 lbs (13.3)

Connections:

DVI Signal: DVI-I Female
VGA Signal: 15-pin Female D-SUB
Composite Signal: RCA Female Jack
S-Video: S-Video Socket
Remote Keypad Interface: 25-pin Female D-SUB
RS232 Control: 9-pin Female D-SUB
AC Power: IEC Inlet
Aux, AC Power Supply: IEC Outlet

User Controls:

Remote Membrane Keypad with Buttons for: Menu & Power.
Brightness Knob: Backlight Bright Potentiometer & AC Power LED.

Backlight Brightness: Remote Panel Knob (Potentiometer).

Shipping Details:

Carton Size (cm): 26" (66)W x 28" (71)H x 8" (20) D
Weight (kg): 32 lbs (14.5)

APPROVALS / WARRANTY

Compliance:

Maritime / Military: IEC 60945 4th Edition. IEC 61174 (ECDIS), IEC 60936 (RADAR) & IEC 60529 (IP). MIL-STD-810F & MIL-STD-901D. IACS E10 (to obtain ABS, BV, CCS, GL,KR, LR, NK, RINA, RS).

Type Approvals:

ABS - Pending

Limited Warranty:

2 Year

ORDERING CODE

26" Centric GB Display: 23-2610-GB

Canadian Headquarters:

Nauticomp Inc.
8 Callaghan Road
Lindsay, Ontario,
Canada, K9V 4R4.
p: +1 705-328-2992
f: +1 705-328-2990

United Kingdom:

Nauticomp Europe Limited
Barham Court,
Teston, Maidstone, Kent
ME18 5BZ, United Kingdom
p: +44 (0) 1622 618707
f: +44 (0) 1622 735469

United States:


Nauticomp International
3886 SW 30th Avenue
Fort Lauderdale, Florida
United States 33312.
p: +1 954-235-4875
f: +1 705-328-2990

URL: www.nauticomp.com E-Mail: sales@nauticomp.com

Due to a policy of continuous product development NAUTICOMP reserves the right to change specifications and descriptions without prior notification. All trade marks acknowledged.


Measurements - Display

Note: All dimensions are in mm and (inch)

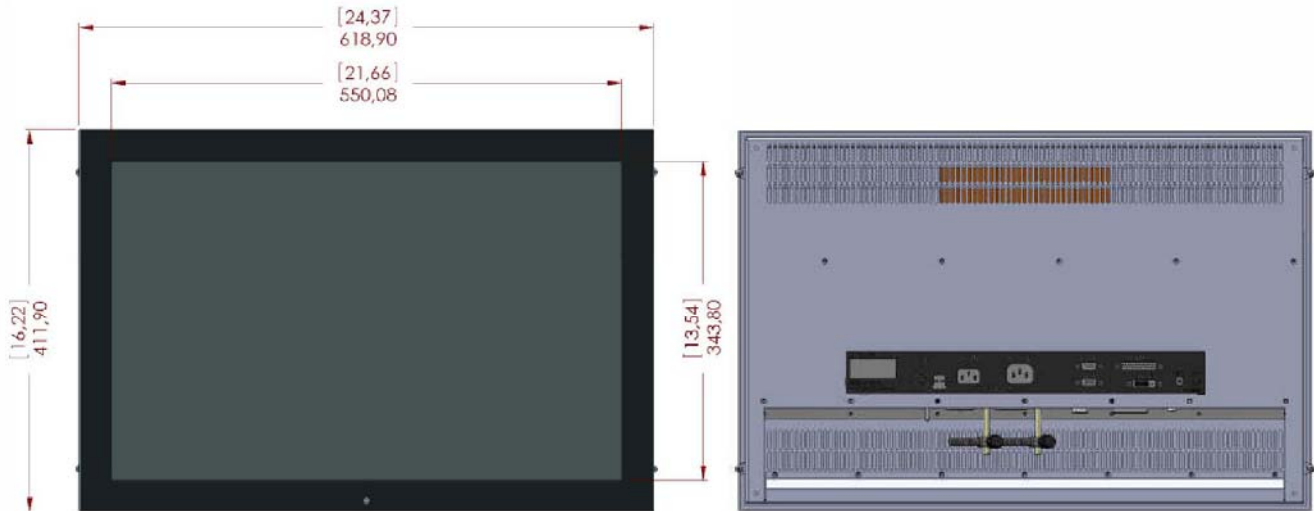


Front view

Back view

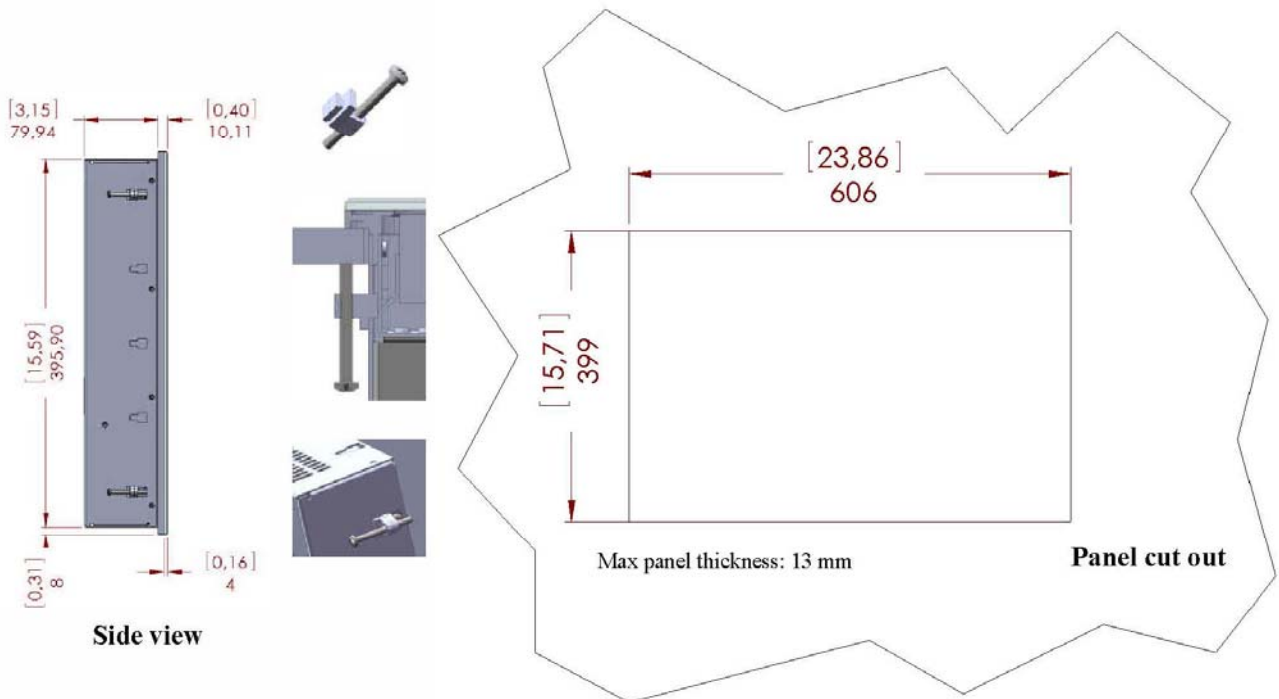

Side view

Panel cut out

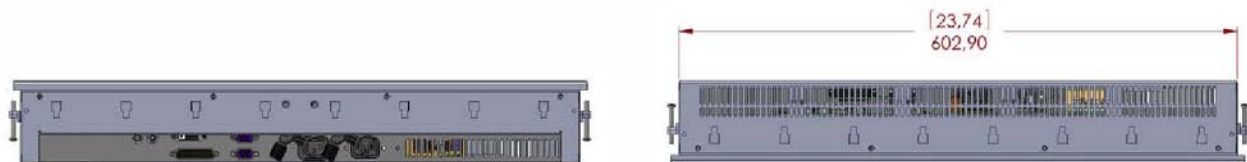

Bottom view

Top view

Canadian Headquarters:

Nauticomp Inc.
8 Callaghan Road
Lindsay, Ontario,
Canada, K9V 4R4.
p: +1 705-328-2992
f: +1 705-328-2990

United Kingdom:

Nauticomp Europe Limited
Barham Court,
Teston, Maidstone, Kent
ME18 5BZ, United Kingdom
p: +44 (0) 1622 618707
f: +44 (0) 1622 735469

United States:

Nauticomp International
3886 SW 30th Avenue
Fort Lauderdale, Florida
United States 33312.
p: +1 954-235-4875
f: +1 705-328-2990

URL: www.nauticomp.com E-Mail: sales@nauticomp.com

Due to a policy of continuous product development NAUTICOMP reserves the right to change specifications and descriptions without prior notification. All trade marks acknowledged.